
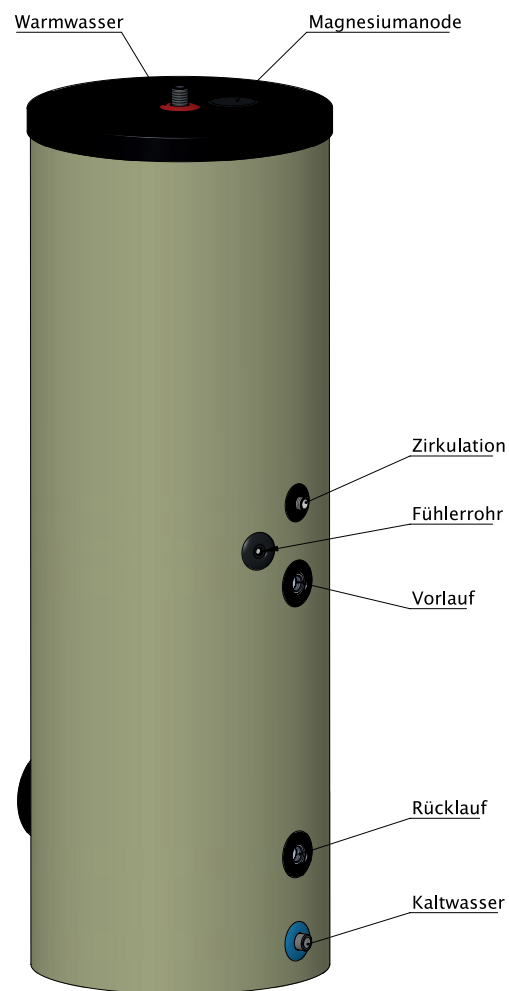


Technische Daten

Warmwasserspeicher

HT 120 ER

HT 160 - 200 - 300 - 400 - 500 ERM

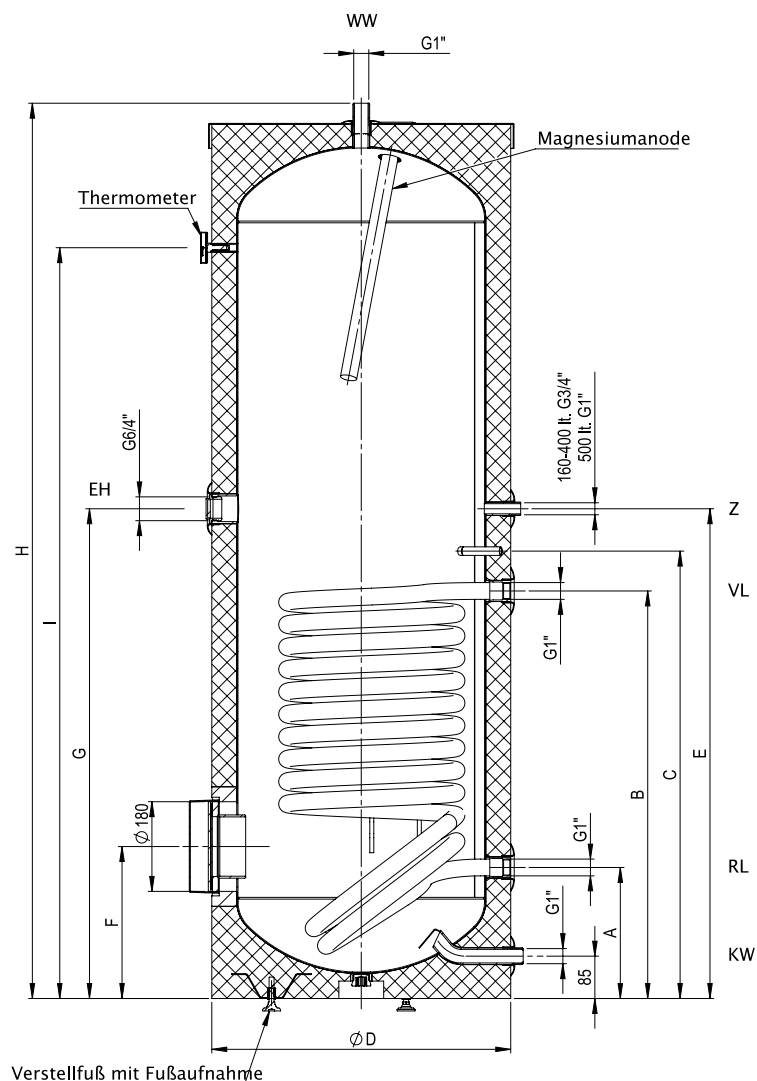

Die Standfüße dürfen NICHT für Transportzwecke verwendet werden!


Type	Energieeffizienzklasse	Warmhalteverlust W	Speichervolumen L	Abmessungen in mm								
				H	ØD	A	B	C	E	F	G	I
HT 120 ER	B	52	120	913	600	263	503	543	403	305	-	633
HT 160 ERM	C	61	160	1118	610	263	503	583	668	305	668	828
HT 200 ERM	C	70	200	1340	610	263	638	718	803	305	803	1050
HT 300 ERM	C	91	300	1797	610	263	818	898	983	305	983	1507
HT 400 ERM	C	102	400	1832	680	305	910	960	1000	345	1000	1521
HT 500 ERM	C	113	500	1838	760	370	930	1010	1040	370	1095	1498

Technical data

Hot water tank

HT 120 ER

HT 160 - 200 - 300 - 400 - 500 ERM

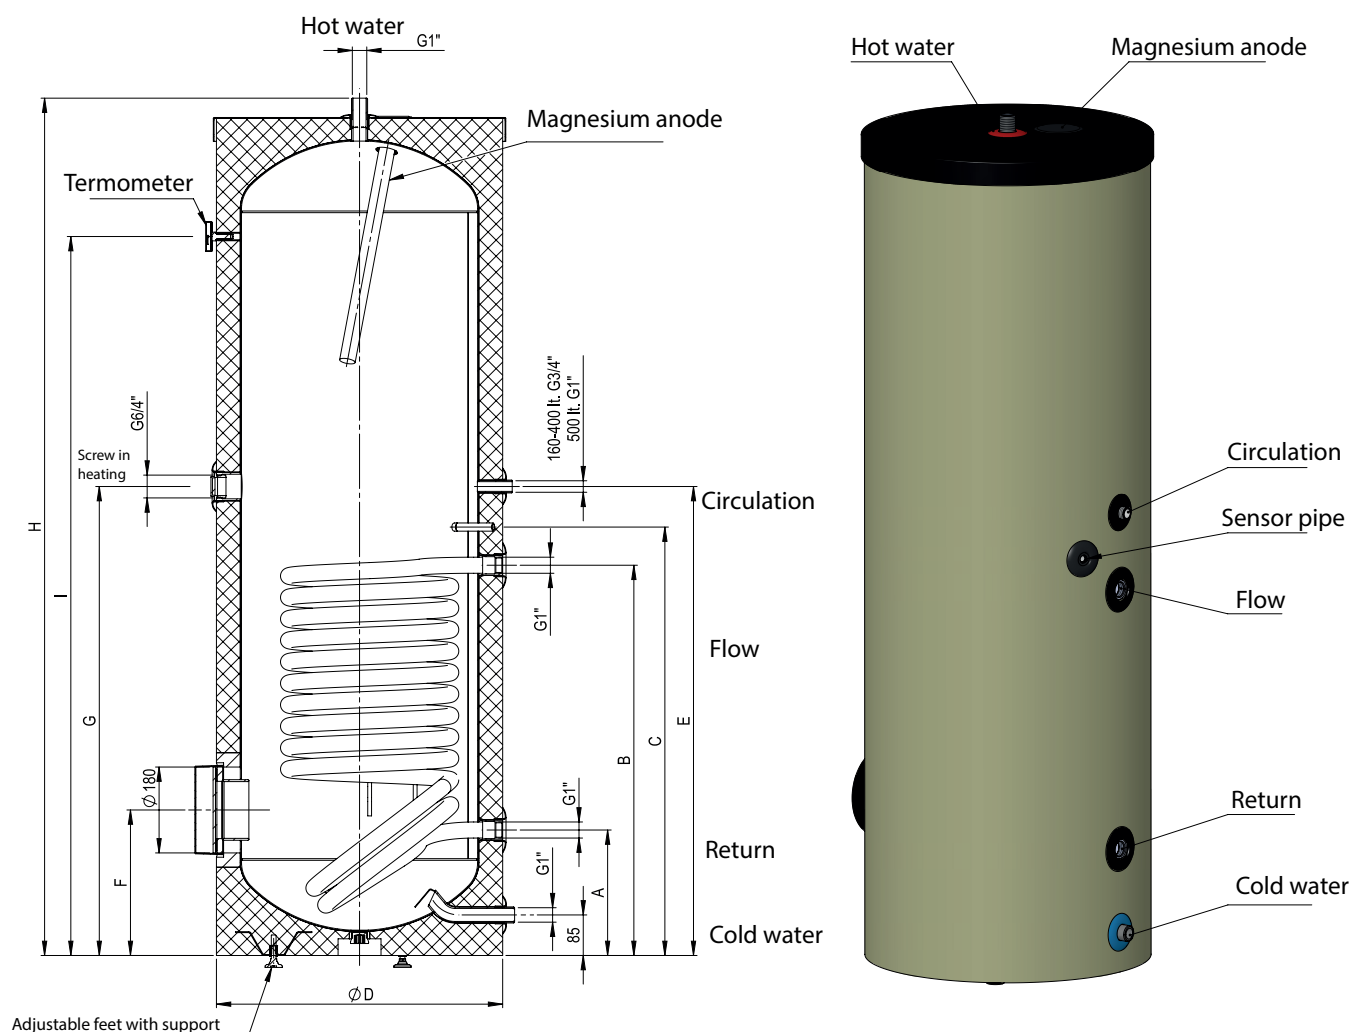

The support pedestals must NOT be used for transport purposes!


Type	Energy efficiency class	Standing loss W	Tank volume L	Dimensions in mm								
				H	ØD	A	B	C	E	F	G	I
HT 120 ER	B	52	120	913	600	263	503	543	403	305	-	633
HT 160 ERM	C	61	160	1118	610	263	503	583	668	305	668	828
HT 200 ERM	C	70	200	1340	610	263	638	718	803	305	803	1050
HT 300 ERM	C	91	300	1797	610	263	818	898	983	305	983	1507
HT 400 ERM	C	102	400	1832	680	305	910	960	1000	345	1000	1521
HT 500 ERM	C	113	500	1838	760	370	930	1010	1040	370	1095	1498

Caractéristiques techniques

Ballon d'eau chaude

HT 120 ER

HT 160 - 200 - 300 - 400 - 500 ERM

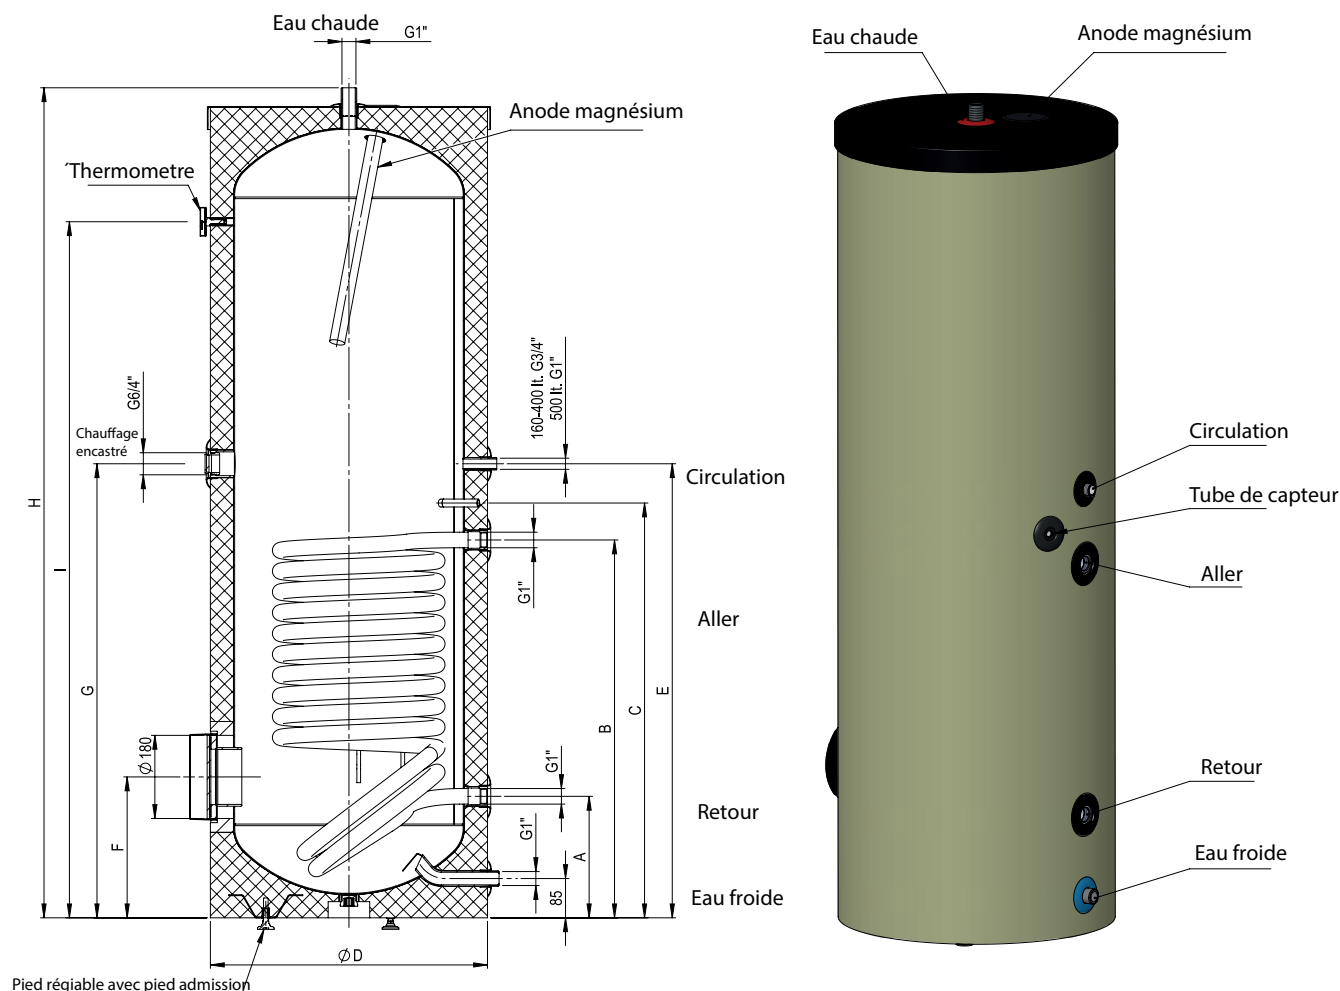

Les piétements NE doivent PAS servir au transport !


Type	Classe d'efficacité	Pertes statiques W	Capacité de stockage L	Dimensions en mm								
				H	ØD	A	B	C	E	F	G	I
HT 120 ER	B	52	120	913	600	263	503	543	403	305	-	633
HT 160 ERM	C	61	160	1118	610	263	503	583	668	305	668	828
HT 200 ERM	C	70	200	1340	610	263	638	718	803	305	803	1050
HT 300 ERM	C	91	300	1797	610	263	818	898	983	305	983	1507
HT 400 ERM	C	102	400	1832	680	305	910	960	1000	345	1000	1521
HT 500 ERM	C	113	500	1838	760	370	930	1010	1040	370	1095	1498

Dati tecnici

Bollitore acqua calda

HT 120 ER

HT 160 - 200 - 300 - 400 - 500 ERM

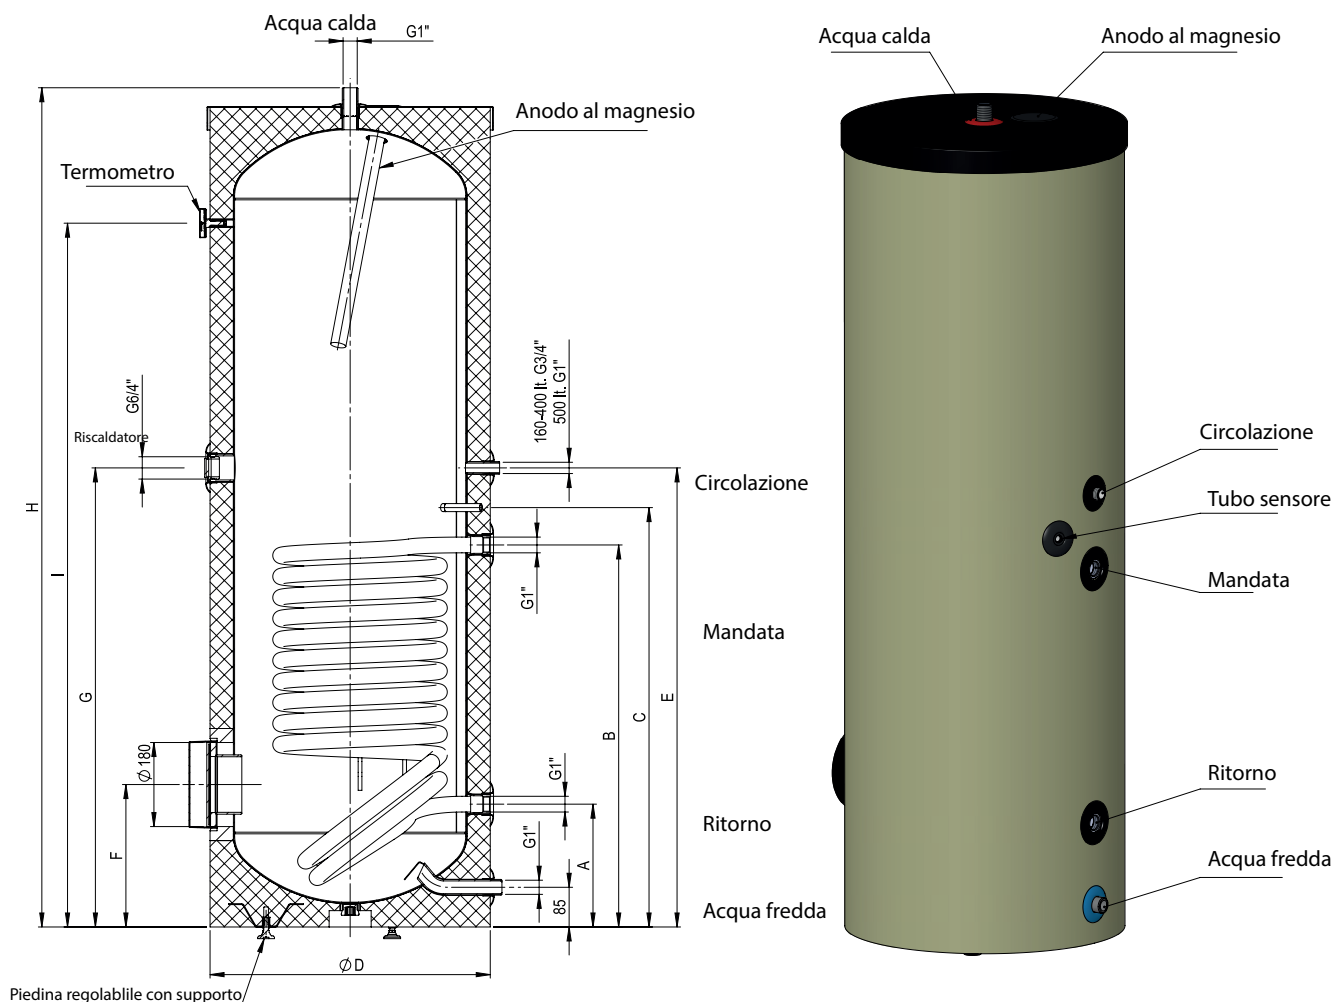


NON usare i piedini per il trasporto!

Type	Classe di efficienza energetica	Dispersione W	Volume utile L	Dimensioni in mm								
				H	ØD	A	B	C	E	F	G	I
HT 120 ER	B	52	120	913	600	263	503	543	403	305	-	633
HT 160 ERM	C	61	160	1118	610	263	503	583	668	305	668	828
HT 200 ERM	C	70	200	1340	610	263	638	718	803	305	803	1050
HT 300 ERM	C	91	300	1797	610	263	818	898	983	305	983	1507
HT 400 ERM	C	102	400	1832	680	305	910	960	1000	345	1000	1521
HT 500 ERM	C	113	500	1838	760	370	930	1010	1040	370	1095	1498

Datos técnicos

Acumulador de agua caliente
HT 120 ER
HT 160 - 200 - 300 - 400 - 500 ERM

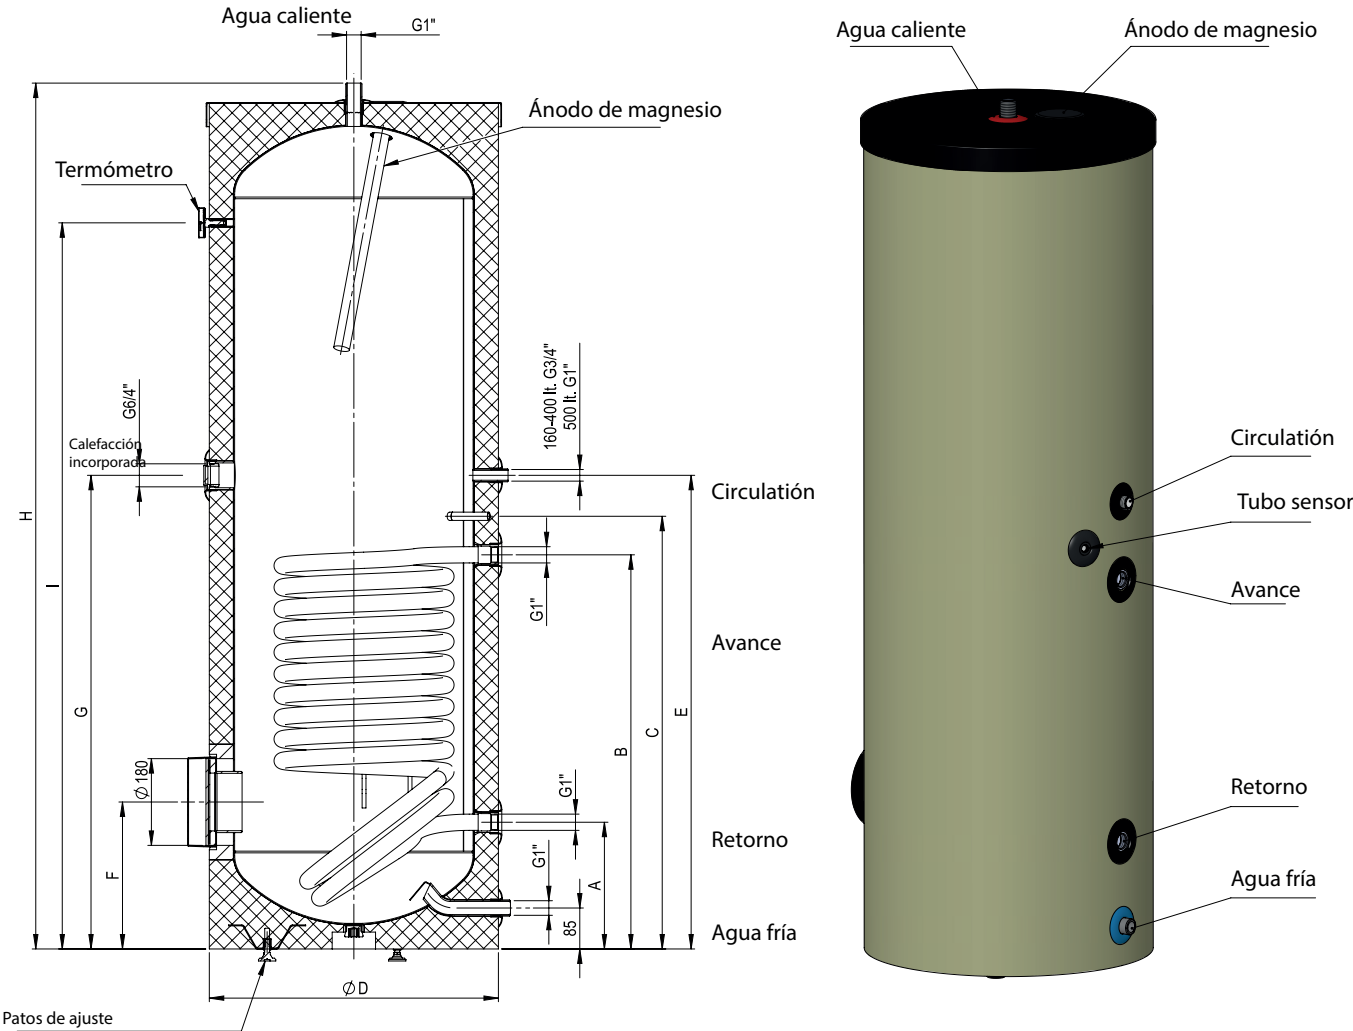

¡Está PROHIBIDO utilizar las patas de apoyo para el transporte!


Type	Clase de eficiencia energética	Pérdida de Calentamiento W	Volumen de la caldera L	Dimensiones en mm								
				H	ØD	A	B	C	E	F	G	I
HT 120 ER	B	52	120	913	600	263	503	543	403	305	-	633
HT 160 ERM	C	61	160	1118	610	263	503	583	668	305	668	828
HT 200 ERM	C	70	200	1340	610	263	638	718	803	305	803	1050
HT 300 ERM	C	91	300	1797	610	263	818	898	983	305	983	1507
HT 400 ERM	C	102	400	1832	680	305	910	960	1000	345	1000	1521
HT 500 ERM	C	113	500	1838	760	370	930	1010	1040	370	1095	1498

Tehnični podatki

Zbiralnik za toplo vodo

HT 120 ER

HT 160 - 200 - 300 - 400 - 500 ERM

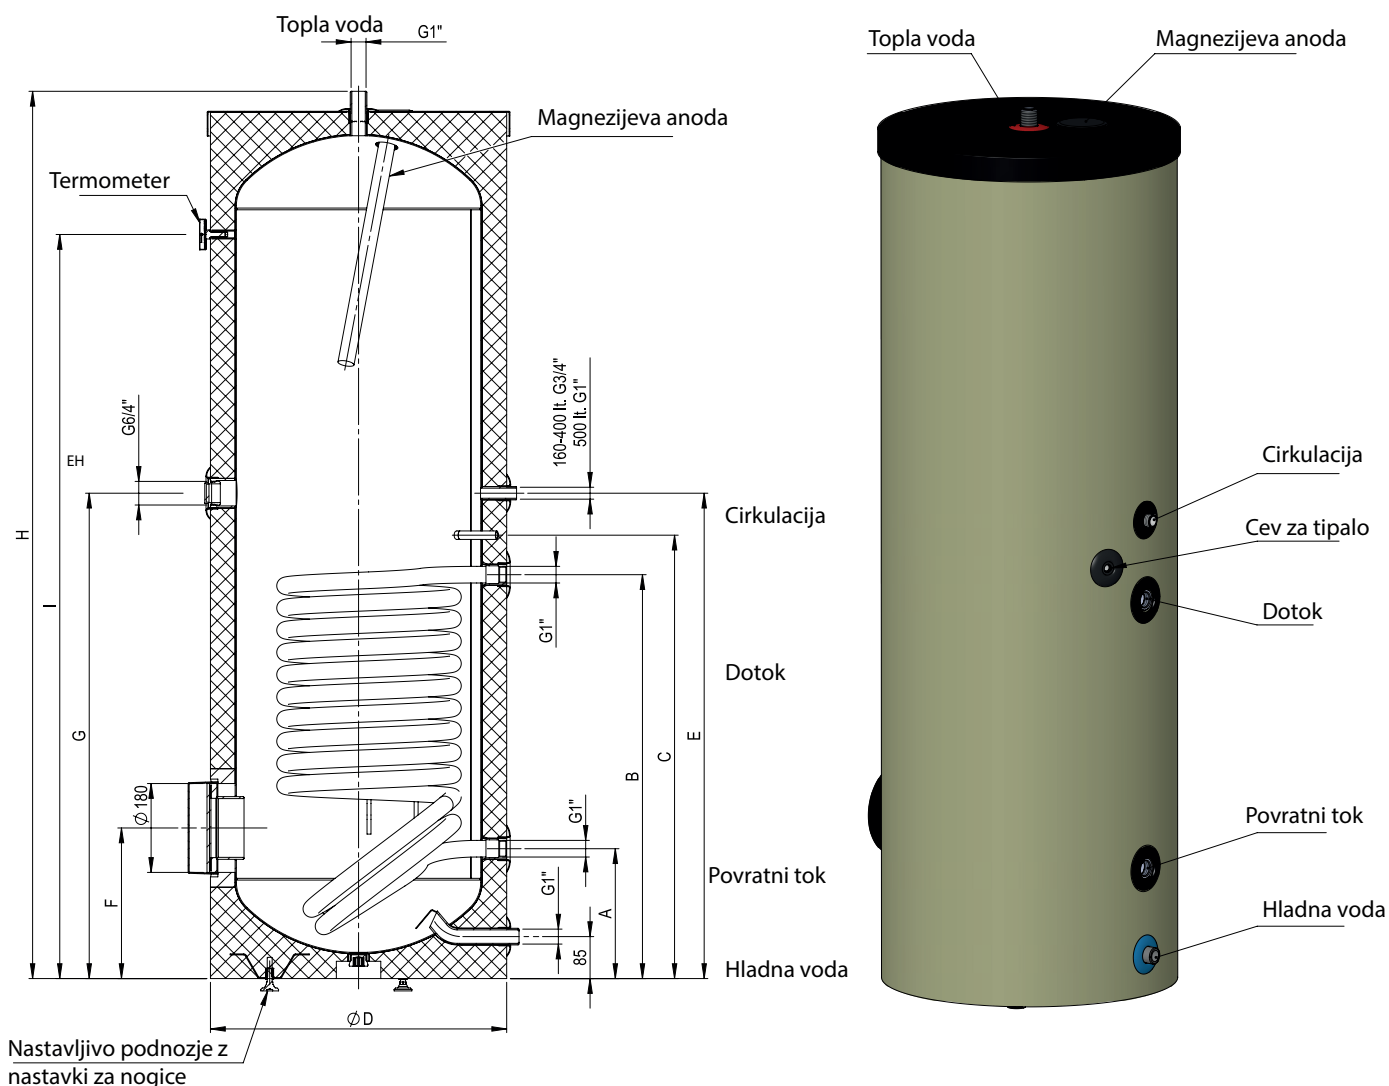

Podnožja NE smete uporabljati v transportne namene!


Type	energijski razred	toplotnih izgub	nazivna moč	Dimenzije v mm								
				H	ØD	A	B	C	E	F	G	I
HT 120 ER	B	52	120	913	600	263	503	543	403	305	-	633
HT 160 ERM	C	61	160	1118	610	263	503	583	668	305	668	828
HT 200 ERM	C	70	200	1340	610	263	638	718	803	305	803	1050
HT 300 ERM	C	91	300	1797	610	263	818	898	983	305	983	1507
HT 400 ERM	C	102	400	1832	680	305	910	960	1000	345	1000	1521
HT 500 ERM	C	113	500	1838	760	370	930	1010	1040	370	1095	1498

Tehnički podaci

Bojler za toplu vodu

HT 120 ER

HT 160 - 200 - 300 - 400 - 500 ERM

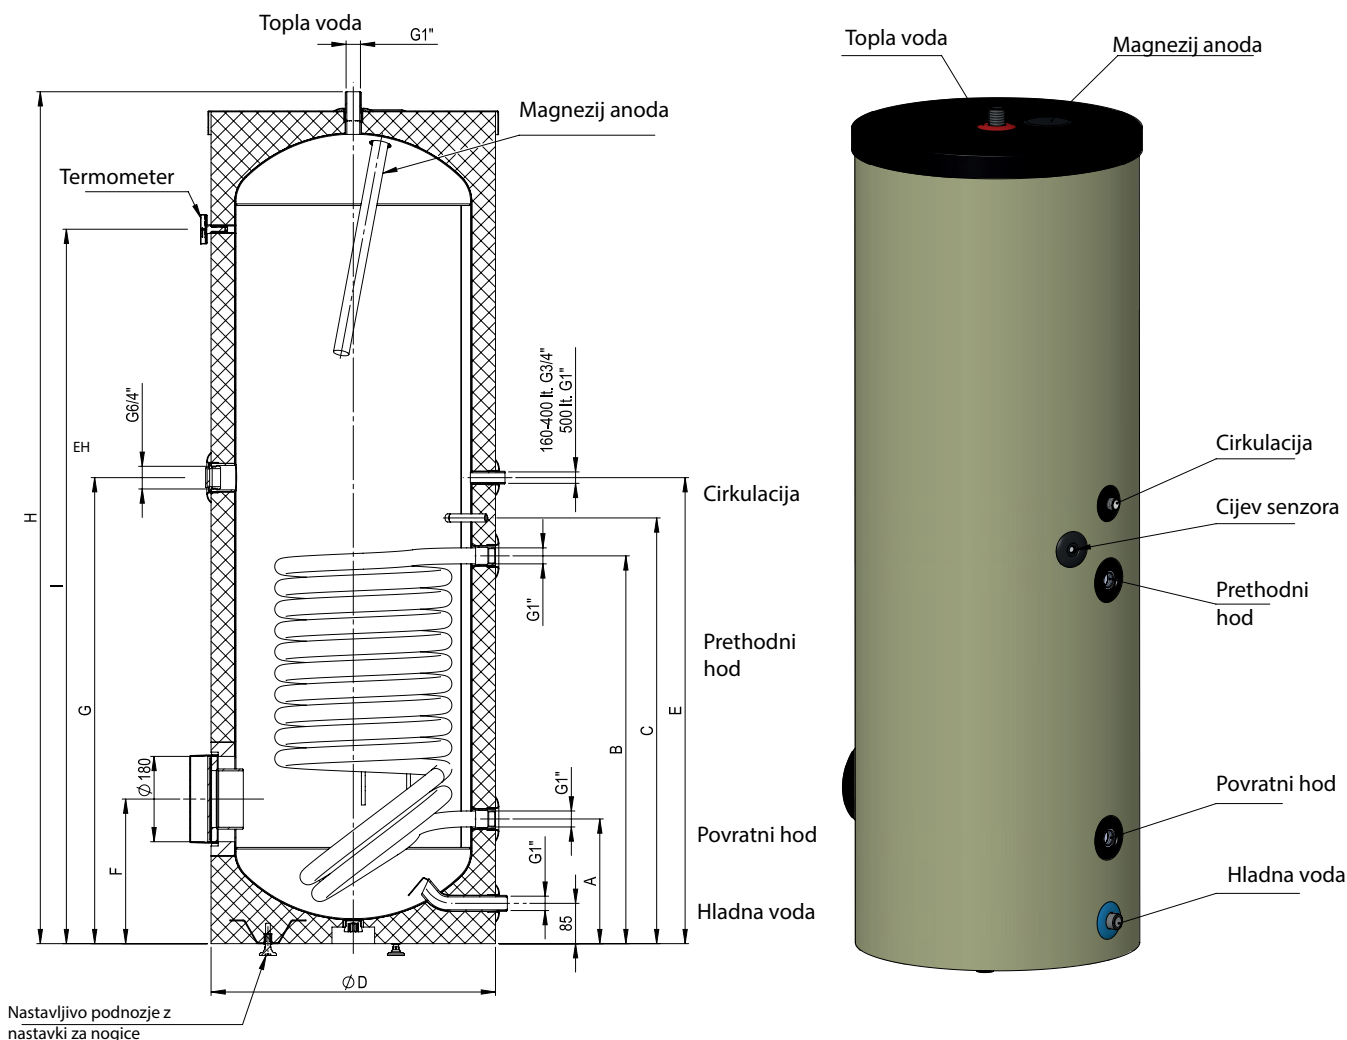

Nožice NE SMIJETE koristiti za potrebe prijevoza!


Type	Razred energetske učinkovitosti	gubitak za-grijavanje	kapaciteta	veličina in mm								
				H	ØD	A	B	C	E	F	G	I
HT 120 ER	B	52	120	913	600	263	503	543	403	305	-	633
HT 160 ERM	C	61	160	1118	610	263	503	583	668	305	668	828
HT 200 ERM	C	70	200	1340	610	263	638	718	803	305	803	1050
HT 300 ERM	C	91	300	1797	610	263	818	898	983	305	983	1507
HT 400 ERM	C	102	400	1832	680	305	910	960	1000	345	1000	1521
HT 500 ERM	C	113	500	1838	760	370	930	1010	1040	370	1095	1498

Technická data

Zásobník teplé vody

HT 120 ER

HT 160 - 200 - 300 - 400 - 500 ERM

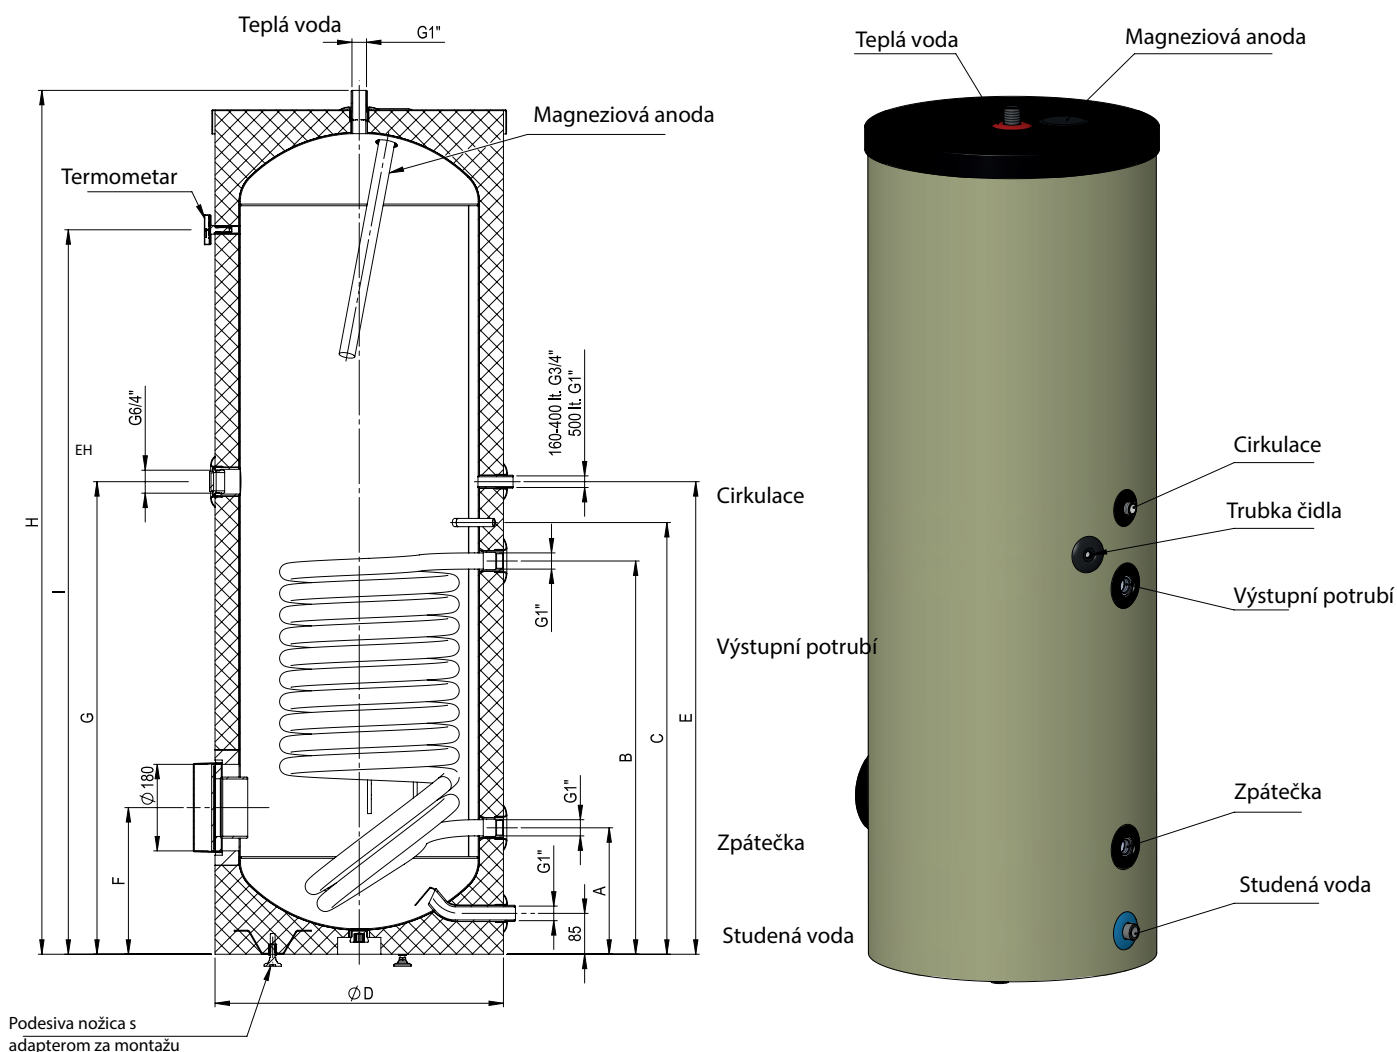

Opěrné nohy se NESMĚJÍ použít pro přepravu!


Type	Energetická třída	ztráta oteplování	kapacita	Rozměry v mm								
				H	ØD	A	B	C	E	F	G	I
HT 120 ER	B	52	120	913	600	263	503	543	403	305	-	633
HT 160 ERM	C	61	160	1118	610	263	503	583	668	305	668	828
HT 200 ERM	C	70	200	1340	610	263	638	718	803	305	803	1050
HT 300 ERM	C	91	300	1797	610	263	818	898	983	305	983	1507
HT 400 ERM	C	102	400	1832	680	305	910	960	1000	345	1000	1521
HT 500 ERM	C	113	500	1838	760	370	930	1010	1040	370	1095	1498

технические характеристики

аккумулирующая емкость для горячей воды

HT 120 ER

HT 160 - 200 - 300 - 400 - 500 ERM

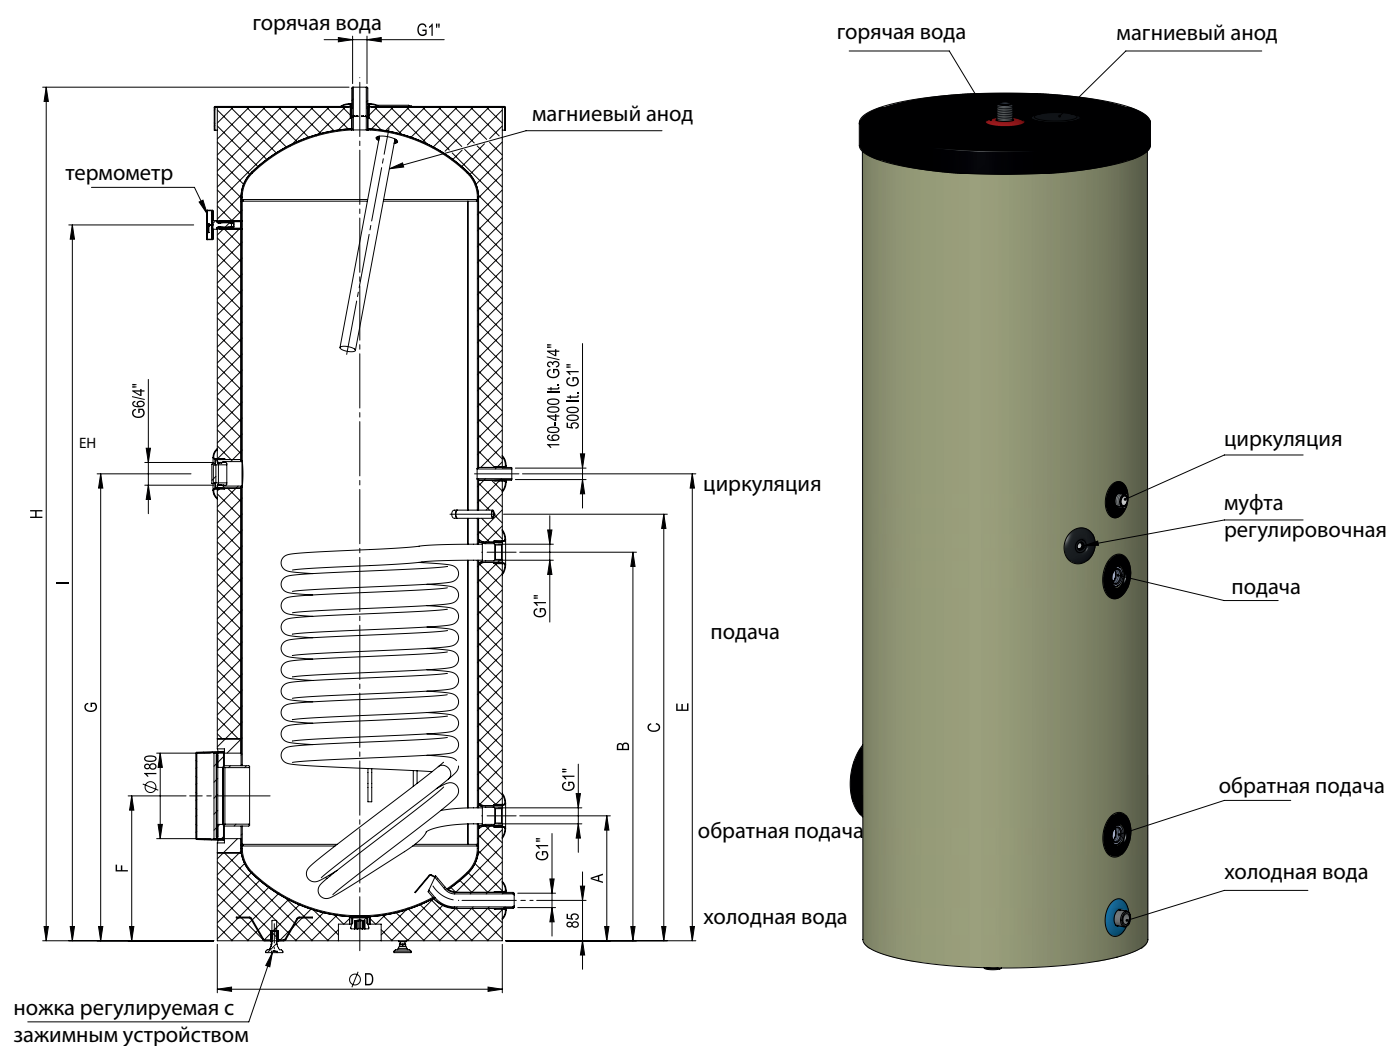

ЗАПРЕЩЕНО использовать опорные ножки для транспортировки!

модель	Класс энергоэфф ективности	потеря потеря	номинальная мощность	размеры в мм								
				H	ØD	A	B	C	E	F	G	I
HT 120 ER	B	52	120	913	600	263	503	543	403	305	-	633
HT 160 ERM	C	61	160	1118	610	263	503	583	668	305	668	828
HT 200 ERM	C	70	200	1340	610	263	638	718	803	305	803	1050
HT 300 ERM	C	91	300	1797	610	263	818	898	983	305	983	1507
HT 400 ERM	C	102	400	1832	680	305	910	960	1000	345	1000	1521
HT 500 ERM	C	113	500	1838	760	370	930	1010	1040	370	1095	1498